

OZSAFE YARDMESH[®] FENCING

Hot Dipped Galvanised





Yardmesh
Gate Hinges



10 Year
WARRANTY
conditions apply



Made to Last | Best Value Fence on the Market.

Simple but Effective fencing . . .

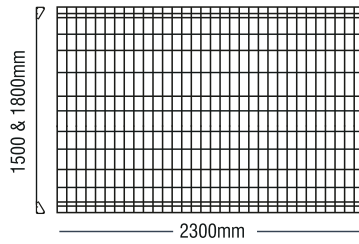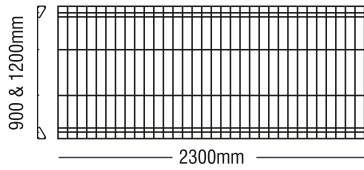



Fence Panel

Height	STD Width
900mm	2300mm
1200mm	2300mm
1500mm	2300mm
1800mm	2300mm





STD Access Gate

Height	STD Width
900mm	920mm
1200mm	920mm
1500mm	955mm
1800mm	955mm



XL Access Gate

Height	STD Width
900mm	1490mm
1200mm	1490mm
1500mm	1455mm
1800mm	1455mm

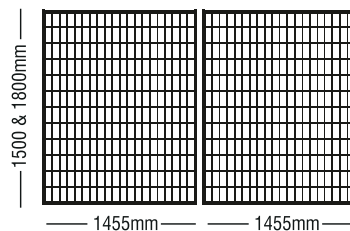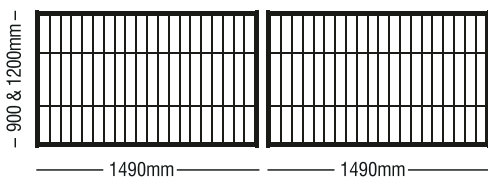

Driveway Gates

Height	STD Width
900mm	2 x 1490mm
1200mm	2 x 1490mm
1500mm	2 x 1455mm
1800mm	2 x 1455mm

Specifications

Ozsafe Yardmesh® products are fully hot dipped galvanised for maximum life span. They are constructed from 5mm steel vertical wires and can be ordered with an attractive powder coated finish in a great range of colours. Powder coated finishes attract additional charges and may increase lead times.

Panels have a folded triangular section top and bottom, while gates have a fully welded 25mm x 25mm RHS frame. The .900mm & 1.2h panels & gates vertical wire spacing's are 65mm apart, reinforced by 2 horizontal wires. The 1.5 & 1.8H panels & gates vertical wire spacing's are 50 mm with 150mm horizontal wires.

Gate widths shown are actual manufactured size, fitting size needs to include hinges, latch, and posts allowance.

Your Local Distributor

**OUR TOWN
FENCING®**

Australia's Leading Manufacturer of Quality Fencing Material



www.ourtownfencing.com.au
sales@ourtownfencing.com.au



1300 901 401

